

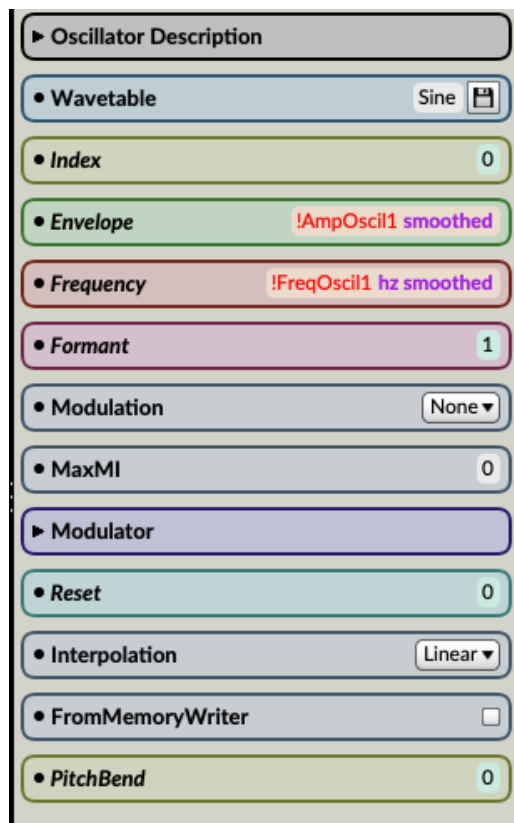




Oscillator receiving OSC for Envelope and Frequency

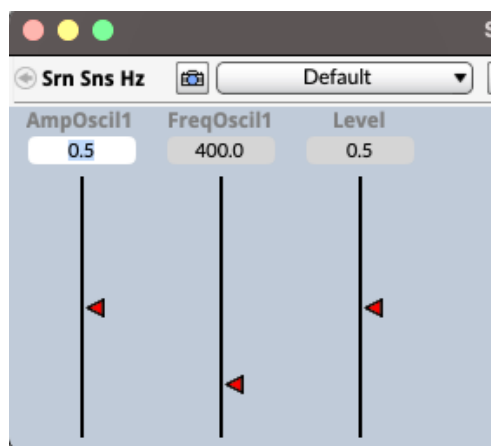


I have to scale between 0. and 1. for Kyma to read the hz that I want.
I have scaled the VCS to 0 - 2000 for the hz range I would like to send.
Here I would like 400 hz so I am sending 0.2 OSC.

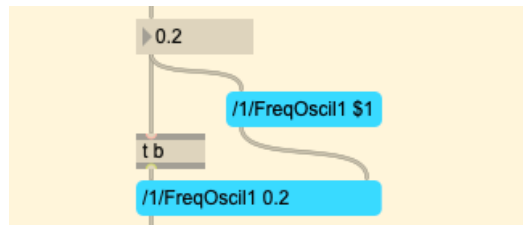

Another example is that I would like 1200 hz so I need to send via OSC 0.6

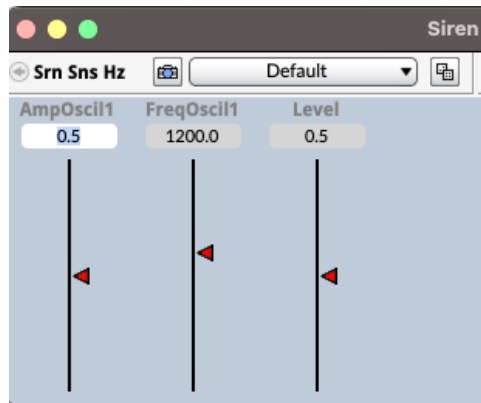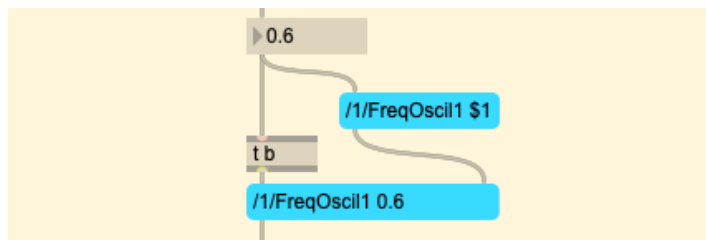

I would like to send the hz.
Such as here, when I send 262 via OSC

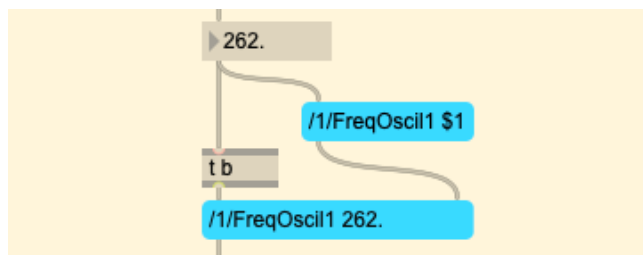

Kyma interprets as 524000 hz.

